


# BLIND FLANGE



drilled according to DIN EN 1092-1 PN 10  
PP glass fiber reinforced with steel inlay

PP-Stahl

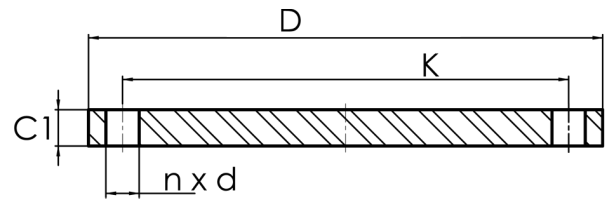

| Art. No. | DN<br>[mm] | d1<br>[mm] | D<br>[mm] | K<br>[mm] | n | ød<br>[mm] | M  | C1<br>[mm] | PFA<br>[bar] | kg   |
|----------|------------|------------|-----------|-----------|---|------------|----|------------|--------------|------|
| 13106051 | 40         | 50         | 150       | 110       | 4 | 18         | 16 | 18         | 16           | 1,00 |

Other materials, dimensions and pressure classes on request  
PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0