

# BLANKING FLANGE SET




drilled according to DIN EN 1092-1 PN 10

Set composed of:

loose flange PP glass fiber reinforced with steel inlay with PP-R end blank  
optional with threaded connection

PP

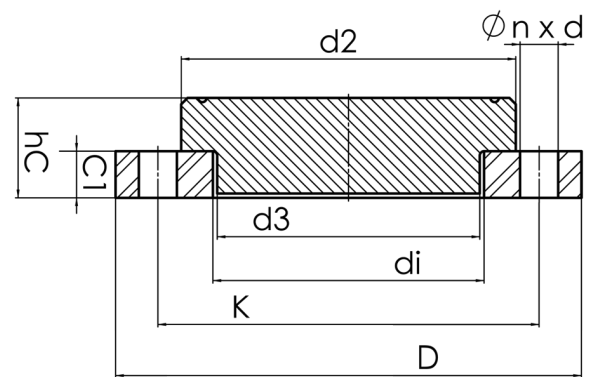

| Art. No.    | DN<br>[mm] | d1<br>[mm] | d2<br>[mm] | d3<br>[mm] | D<br>[mm] | K<br>[mm] | n | ød<br>[mm] | C1<br>[mm] | hc<br>[mm] | kg   |
|-------------|------------|------------|------------|------------|-----------|-----------|---|------------|------------|------------|------|
| 13106121-PP | 100        | 125        | 158        | 130        | 221       | 180       | 8 | 18         | 22         | 47         | 2,20 |

other dimensions and pressure classes on request  
PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98  
414 - 0