

# BLANKING FLANGE SET




drilled according to DIN EN 1092-1 PN 10

Set composed of:

loose flange PP glass fiber reinforced with steel inlay with PE 100 end blank  
optional with threaded connection

PE100

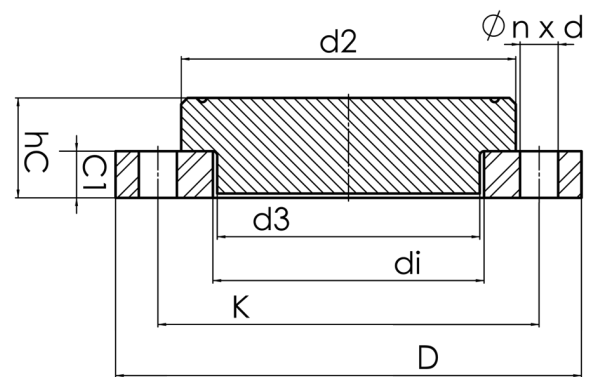

| Art. No.    | DN<br>[mm] | d1<br>[mm] | d2<br>[mm] | d3<br>[mm] | D<br>[mm] | K<br>[mm] | n  | ød<br>[mm] | C1<br>[mm] | hc<br>[mm] | PFA<br>[bar] | kg    |
|-------------|------------|------------|------------|------------|-----------|-----------|----|------------|------------|------------|--------------|-------|
| 13106281-PE | 250        | 280        | 320        | 289        | 406       | 350       | 12 | 22         | 31         | 71         | 16           | 10,90 |

Other materials, dimensions and pressure classes on request

PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0