
Technical Data Sheet

LOOSE FLANGE PP STEEL

drilled according to DIN EN 1092-1
PP glass fiber reinforced with steel inlay



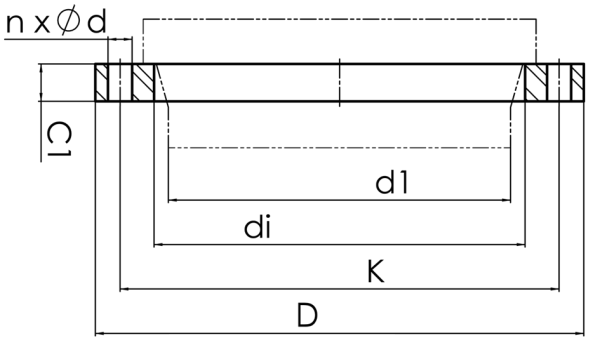

Art. No.	DN [mm]	d1 [mm]	di [mm]	D [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
4113200000500040	40	50	62	150	110	4	18	16	19	16	1,2

other dimensions and pressure classes on request
PFA = maximum allowable operating pressure (20°)
Do not exceed the maximum permissible operating pressure of the seals used
Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0

© STAR Piping Systems GmbH
All rights reserved