
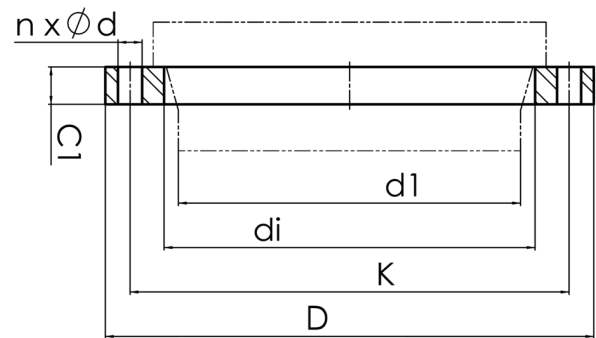


drilled according to DIN EN 1092-1 PN25 und ISO 9624  
Material: 1.0038 (S235JRG2)

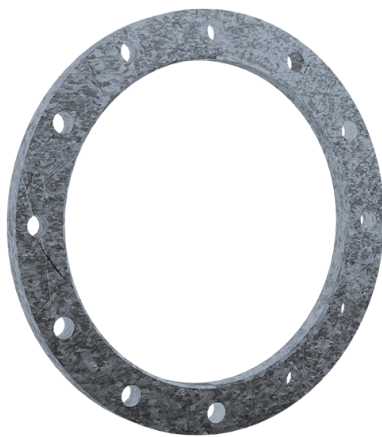

| Art. No.         | DN<br>[mm] | d1<br>[mm] | di<br>[mm] | D<br>[mm] | K<br>[mm] | n | Ød<br>[mm] | M  | C1<br>[mm] | PFA<br>[bar] | kg   |
|------------------|------------|------------|------------|-----------|-----------|---|------------|----|------------|--------------|------|
| 4113910001800150 | 150        | 180        | 188        | 300       | 250       | 8 | 26         | 24 | 30         | 25           | 9,03 |

other dimensions and pressure classes on request  
PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98  
414 - 0