


PP glass fiber reinforced with steel inlay

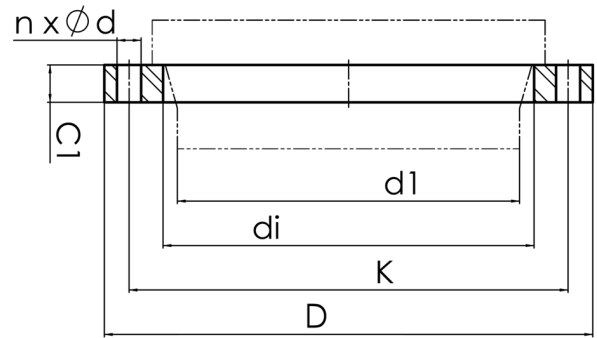

| Art. No. | DN [mm] | d1 [mm] | di [mm] | D [mm] | K [mm] | n | Ød [mm] | C1 [mm] | PFA [bar] | kg |
|------------------|------------|------------|------------|-----------|-----------|---|------------|------------|--------------|-----|
| 4114200000400032 | 1¼" | 40 | 51 | 130 | 89 | 4 | 16 | 16 | 10 | 0,5 |

PFA = maximum allowable operating pressure (20°)

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0