
Technical Data Sheet

PROFILED LOOSE FLANGE??

GGG mit PP-Ummantelung

GGG with PP encapsulated
highly corrosion resistant
drilled according to DIN EN 1092-1 PN 10/16



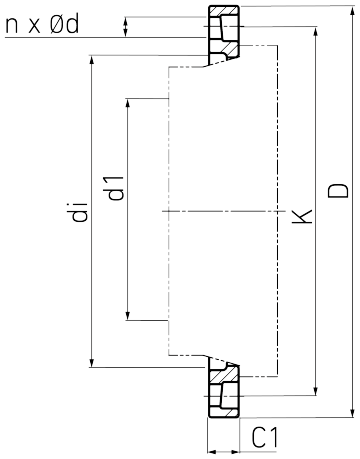

Art. No.	DN [mm]	d1 [mm]	di [mm]	D [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
4114400000630050	50	63	78	171	125	4	18	16	20	16	0,9

galvanized on request

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0

© STAR Piping Systems GmbH
All rights reserved