



# PROFILED LOOSE FLANGE

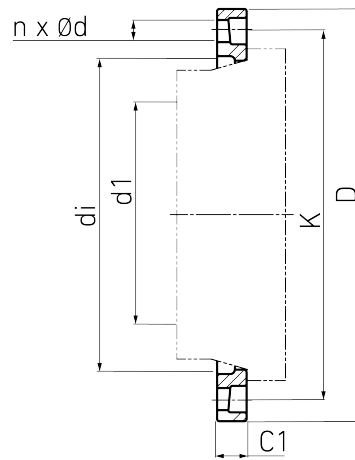

GGG with PP encapsulated  
highly corrosion resistant  
drilled according to DIN EN 1092-1 PN 10

GGG mit PP-Ummantelung

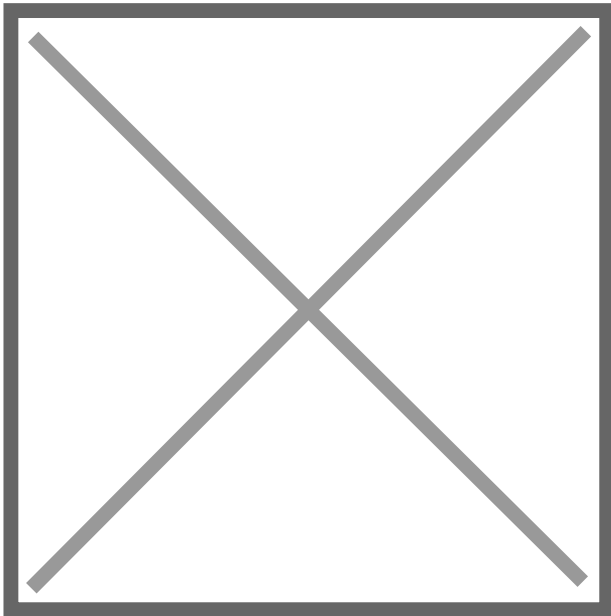

Art. No.	DN [mm]	d1 [mm]	di [mm]	D [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
4114410008000800	800	800	843	1026	950	24	33	30	58	6	39,3

galvanized on request  
Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98  
414 - 0