
Technical Data Sheet

PROFILED LOOSE FLANGE??

GGG mit PP-Ummantelung

GGG with PP encapsulated
highly corrosion resistant
drilled according to DIN EN 1092-1 PN 10



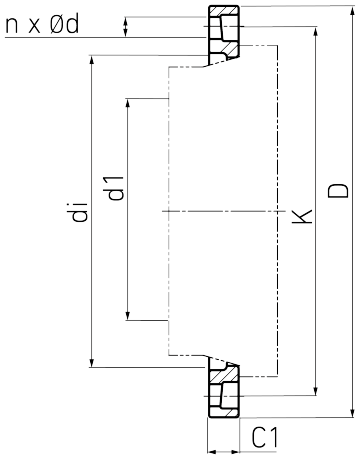

Art. No.	DN [mm]	d1 [mm]	di [mm]	D [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
4114410010001000	1000	1000	1050	1245	1160	28	36	33	70	6	60

galvanized on request

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0

© STAR Piping Systems GmbH
All rights reserved