



PROFILED LOOSE FLANGE

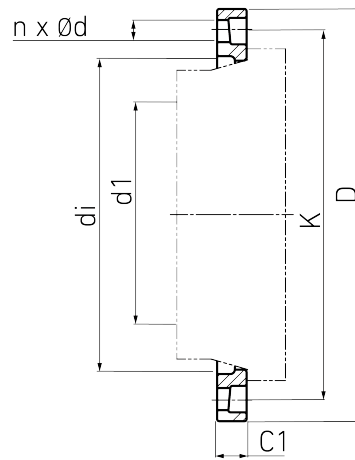

GGG with PP encapsulated
highly corrosion resistant
drilled according to DIN EN 1092-1 PN 16

GGG mit PP-Ummantelung

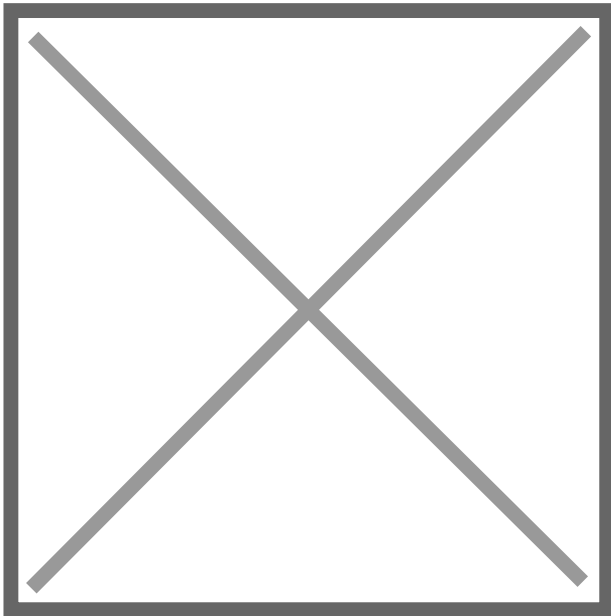

Art. No.	DN [mm]	d1 [mm]	di [mm]	D [mm]	z1 [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
4114420002250200	225	225	238	350		295	12	22	20	31	16	3,05

galvanized on request

Note: Use washers when screwing

For questions, please feel free to contact us at: Tel. + 49
281 98 414 - 0