


LOOSE FLANGE FOR OUTLET FLANGE ADAPTOR



full-plastic flange glas fiber reinforced
with V-groove which applies force evenly on collar

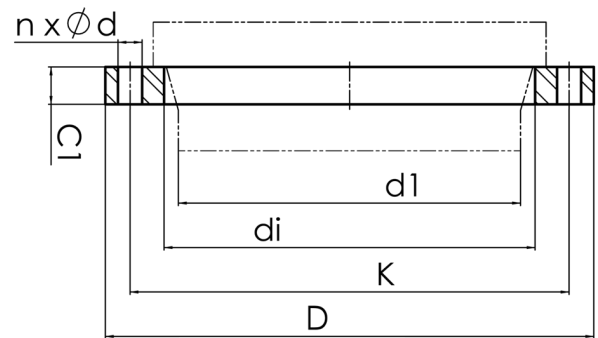

| Art. No. | DN [mm] | d1 [mm] | di [mm] | D [mm] | K [mm] | n | ød [mm] | C1 [mm] | PFA [bar] | kg |
|------------------|------------|------------|------------|-----------|-----------|---|------------|------------|--------------|-----|
| 4114800001600150 | 150 | 160 | 190 | 285 | 240 | 8 | 22 | 32 | 16 | 3,1 |

PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0