
Technical Data Sheet

RUBBER STEEL GASKET EPDM

EPDM

Rubber steel gasket for Stub ends and other plastic flanges
Certification for drinking water conform to DIN-EN-681-1
tight at small screw tightening torques
EPDM-EL (Ethylene Propylene Diene Monomer Rubber Crosslinking Agent Sulphur)
Temp. tmax. -30...+120°C; Shore A hardness 75 ± 5



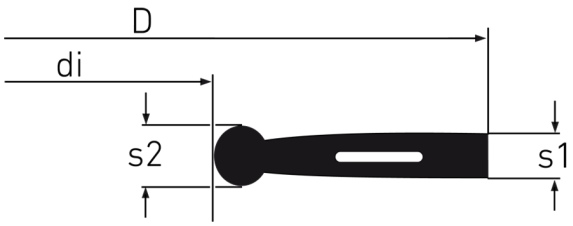

SDR 11

Art. No.	d1 [mm]	di [mm]	D [mm]	s1 [mm]	s2 [mm]	kg
4170701104500000	450	372	594	7	10	1,7

No flow losses due to standard-compliant dimensioning and centering via bolt pattern
Reliable sealing, as it seals even at low surface pressures and the steel insert prevents shifting or blowout

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0

Suitable for water Pressure class conform

© STAR Piping Systems GmbH
All rights reserved