


Rubber steel gasket for Stub ends and other plastic flanges
 Certification for drinking water conform to DIN-EN-681-1
 tight at small screw tightening torques
 EPDM-EL (Ethylene Propylene Diene Monomer Rubber Crosslinking Agent Sulphur)
 Temp. tmax. -30...+120°C; Shore A hardness 75 ± 5

EPDM



SDR 17

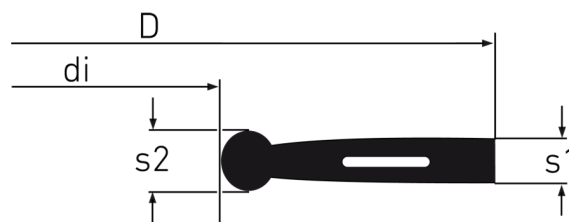

| Art. No. | d1 [mm] | di [mm] | D [mm] | s1 [mm] | s2 [mm] | PFA [bar] | kg |
|------------------|------------|------------|-----------|------------|------------|-----------------|------|
| 4170701700500000 | 50 | 46 | 92 | 3 | 4 | W: 10 / G: 6 | 0,03 |

No flow losses due to standard-compliant dimensioning and centering via bolt pattern
 Reliable sealing, as it seals even at low surface pressures and the steel insert prevents shifting or blowout

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0