
Technical Data Sheet

# RUBBER STEEL GASKET NBR-DUO

## NBR-DUO

Rubber steel gasket for Stub ends and other plastic flanges
Drinking water and gas test certificate/approval according to valid standards and regulations
tight at small screw tightening torques
NBR-DUO-EL (Acrylonitrile butadiene rubber) Temp. tmax. –25...+70°C; Shore A hardness 80 ± 5



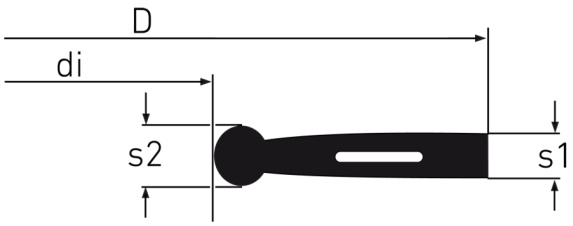


## SDR 11

| Art. No. | d1 [mm] | di [mm] | D [mm] | s1 [mm] | s2 [mm] | kg |
|---|---|---|---|---|---|---|
| 4170711101600000 | 160 | 135 | 218 | 6 | 8 | 0,24 |

No flow losses due to standard-compliant dimensioning and centering via bolt pattern
Reliable sealing, as it seals even at low surface pressures and the steel insert prevents shifting or blowout

**For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0**

Suitable for gas  Suitable for water  Pressure class conform

© STAR Piping Systems GmbH
All rights reserved