


RUBBER STEEL GASKET NBR-DUO



Rubber steel gasket for Stub ends and other plastic flanges
Drinking water and gas test certificate/approval according to valid standards and regulations
tight at small screw tightening torques
NBR-DUO-EL (Acrylonitrile butadiene rubber) Temp. tmax. -25...+70°C; Shore A hardness 80 ± 5

NBR-DUO

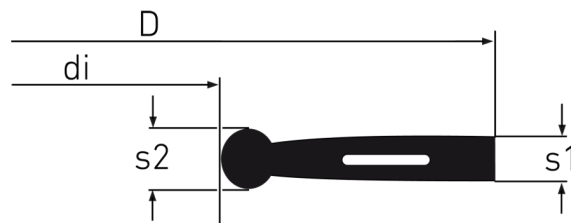

SDR 17



Art. No.	d1 [mm]	di [mm]	D [mm]	s1 [mm]	s2 [mm]	PFA [bar]	kg
4170711700500000	50	46	92	3	4	W: 10 / G: 6	0,03

No flow losses due to standard-compliant dimensioning and centering via bolt pattern
Reliable sealing, as it seals even at low surface pressures and the steel insert prevents shifting or blowout

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0