
Technical Data Sheet

RUBBER STEEL GASKET NBR-DUO

NBR-DUO

Rubber steel gasket for Stub ends and other plastic flanges
Drinking water and gas test certificate/approval according to valid standards and regulations
tight at small screw tightening torques
NBR-DUO-EL (Acrylonitrile butadiene rubber) Temp. tmax. –25...+70°C; Shore A hardness 80 ± 5



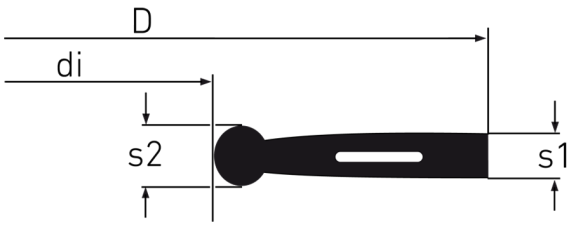

SDR 17

Art. No.	d1 [mm]	di [mm]	D [mm]	s1 [mm]	s2 [mm]	kg
4170711703550000	355	319	438	6	8	0,73

No flow losses due to standard-compliant dimensioning and centering via bolt pattern
Reliable sealing, as it seals even at low surface pressures and the steel insert prevents shifting or blowout

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0

Suitable for gas Suitable for water Pressure class conform

© STAR Piping Systems GmbH
All rights reserved