


# VALVE FLANGE

## PE100-RC

drilled according to DIN EN 1092-1 PN 16  
with EPDM-O-ring gasket and backing ring steel plastic coated  
optional with steel hot-dip galvanized or stainless steel backing ring  
short spigot for butt welding

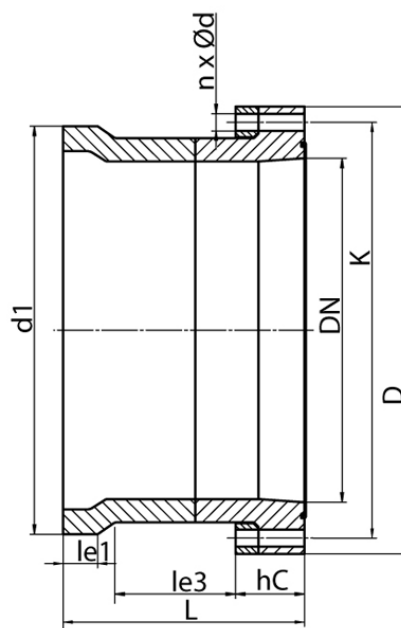

## SDR 11



| Art. No.         | DN<br>[mm] | d1<br>[mm] | D<br>[mm] | le1<br>[mm] | le3<br>[mm] | L<br>[mm] | K<br>[mm] | n  | Ød<br>[mm] | M  | hC<br>[mm] | kg     |
|------------------|------------|------------|-----------|-------------|-------------|-----------|-----------|----|------------|----|------------|--------|
| 4330301107100600 | 600        | 710        | 840       | 85          | 210         | 450       | 770       | 20 | 36         | 33 | 125        | 119,32 |

Other materials, dimensions and pressure classes on request

\* available for gas pipes with flat surface or NBR-Gaskets

**For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0**



gas application on request



Suitable for water



Pressure class conform