


BLIND FLANGE



drilled according to DIN EN 1092-1 PN 10
PP glass fiber reinforced with steel inlay

PP-Stahl

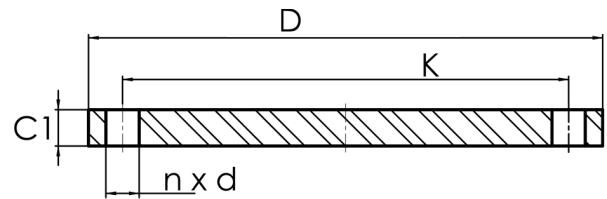

Art. No.	DN [mm]	d1 [mm]	D [mm]	K [mm]	n	ød [mm]	M	C1 [mm]	PFA [bar]	kg
13106061	50	63	165	125	4	18	16	18	16	1,20

Other materials, dimensions and pressure classes on request
PFA = maximum allowable operating pressure (20°)

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0