


# ELECTROFUSION KS SPECIAL FLANGE



drilled according to DIN EN 1092-1 PN 10  
with EPDM-O-ring gasket and backing ring steel plastic coated  
optional with steel hot-dip galvanized or stainless steel backing ring  
4,0 mm pin

PE100-RC

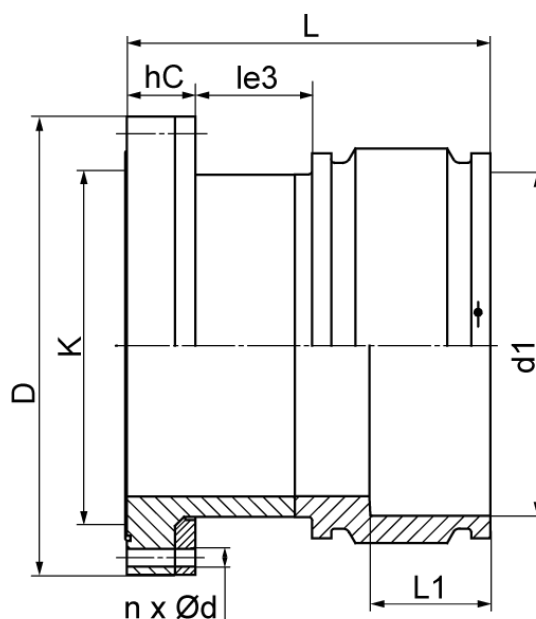

## SDR 17



| Art. No.    | DN<br>[mm] | d1<br>[mm] | D<br>[mm] | le3<br>[mm] | L<br>[mm] | L1<br>[mm] | K<br>[mm] | n  | ød<br>[mm] | hC<br>[mm] | kg     |
|-------------|------------|------------|-----------|-------------|-----------|------------|-----------|----|------------|------------|--------|
| 33012801-EF | 800        | 800        | 1015      | 185         | 675       | 235        | 950       | 24 | 33         | 140        | 199,60 |

Other materials, dimensions and pressure classes on request

For questions, please feel free to contact us at: Tel. + 49 281 98 414 - 0